


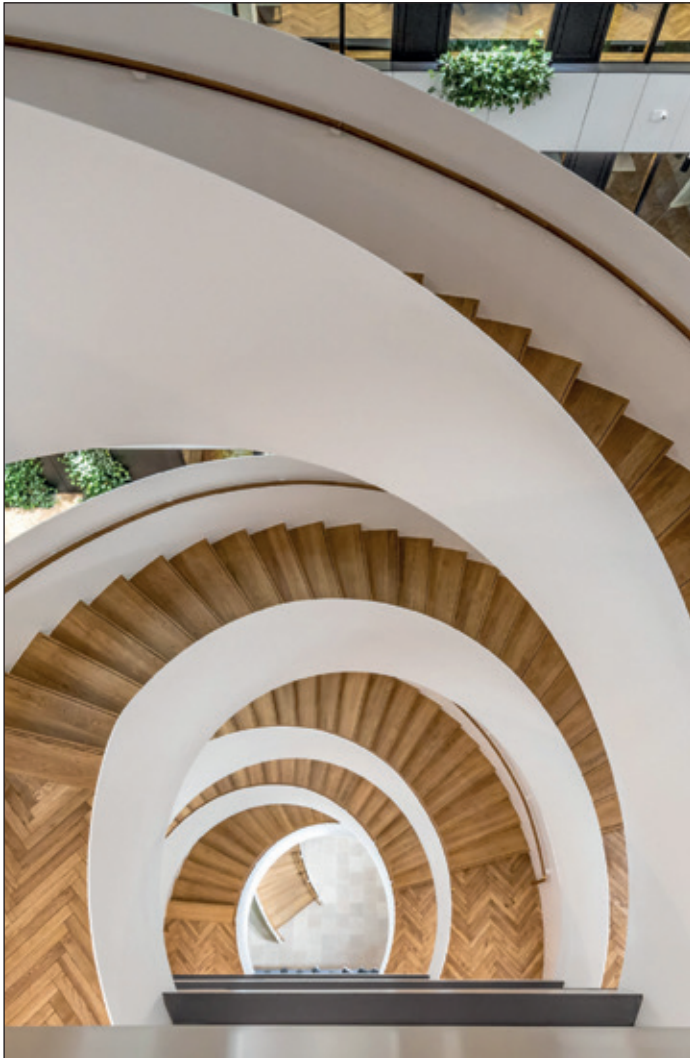


STAIR TREAD SOLUTIONS CHENE DE L'EST
IN SOLID OAK OR ENGINEERED OAK

We offer a complete range of stair treads, risers, and nosing, with or without bevel cuts, all matched to your parquet.

- Stair treads, risers: open, right, left, between two walls, or customs.
- Custom-sized stair tread to be glued onto concrete.
- Turning stair tread on template.

FINISHES: varnished, tinted varnished, vintage floor, French Old Oak, also Loft, aged oak, oxidized wood depending on possibilities.

We will send you a measurement sheet to complete.

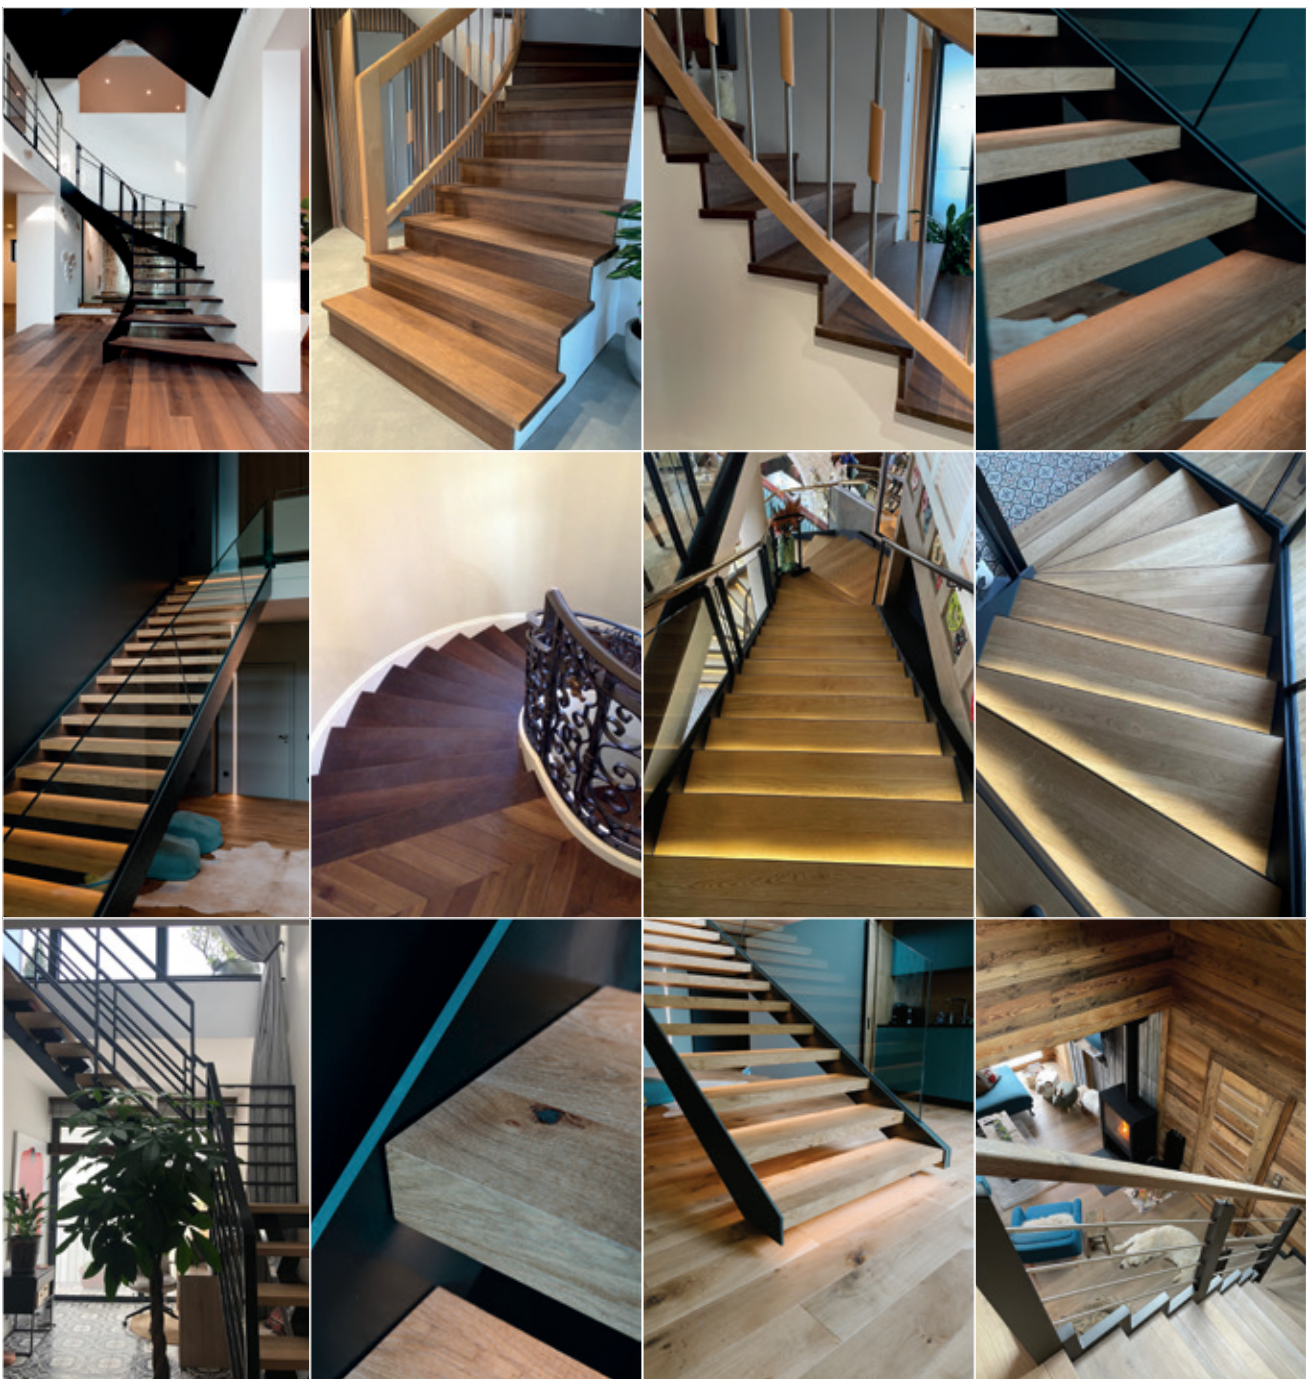

FURNITURE - CUSTOM STEPS, RISERS



Solid panel made with various widths stuck

Designation	Profil Refer to sketches:  matches the sides with a finish.	Thickness	Wood species and type
Step and riser Max. width 3.28' Length up to 4.59' from 4.92' to 6.56': + 15% from 6.89 to 8.2': + 30%	 Finishing: top, front and 2" underside for 9/16", 13/16" and 1 1/8"	9/16"	Solid oak
		13/16"	Solid oak
		1 1/8"	Solid oak
	 Finishing: on 6 sides for the 1 1/2"	1 1/2"	Solid oak

• **NEW** Possibility to have a factory application of INVISIBLE MATT LACKER PROTECTOR in one or two coats (see # for compatible references listed in ranges)

FURNITURE - CUSTOM EDGE OF STEP, STEP, and RISERS WITH MITER CUTS

Finishing: top, front, underside, not at end

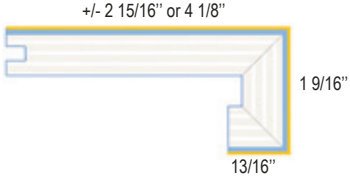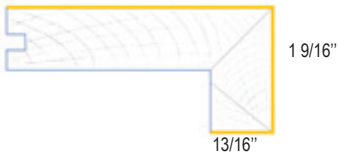Designation	Profil Refer to sketches:  matches the sides with a finish.	Thickness	Wood species and type
Edge of step Small bevel (broken angle) TOP 3.2 lengths: 3.94' / 4.92' / 5.91' / 6.56' / 7.22' Specify parquet type for adaptation. Compatible with : TOP 3.2 thickness 5/8" 9/16" solid (underside of edge of step to be sanded)	 +/- 2 15/16" or 4 1/8" 1 9/16" 13/16"	5/8" (TOP 3,2)	Engineered oak
Edge of step Small bevel (broken angle) Length for 13/16": 3.61'	 +/- 2 15/16" or 4 1/8" 1 9/16" 13/16"	13/16"	Solid oak

Designation	2 Profiles of your choice Refer to sketches:  matches the sides with a finish.	Thickness	Wood species and type
Step and counter step Solid panel made with various widths stuck Front return: 1 9/16" or front return the thickness of the step Maximum width 3.61' Lengths up to 4.59' From 4.92' to 6.56': + 15% From 6.89' to 8.2': + 30%.	 Simple bending: returned in front of blade thickness 9/16" or 13/16"  Double bending: front return 1 9/16"	9/16"	Solid oak
		13/16"	Solid oak

• **NEW** Possibility to have a factory application of INVISIBLE MATT LACKER PROTECTOR in one or two coats (see # for compatible references listed in ranges)

Scan the QR code to access our maintenance guide for Chêne de l'est parquet in PDF format, also available on our website.



FABRIQUÉ
EN
FRANCE



Chêne de l'Est has obtained the A+ label for all finished parquet floors.



Gallery - 7 rue d'Uzès - 75002 Paris - by appointment - www.galleryparis.fr